

Standard Features

Work Area
Non-skid Metal Deck Construction
4,000 lb (1800 kg) Combined Platform Capacity:
3,000 lb (1350 kg) Material Load Zone in Center of Platform
PLUS
1,000 lb (450 kg) Distributed Load for up to four (4) Workers and Tools
Stainless Steel Wire Rope Lanyard Anchors for Full Platform Mobility
Easy Access Sliding Side Gates for Material Loading
Pinless Guardrail System for Quick & Simple Guard Rail Lowering
AC Power to the Platform

Performance
Fully Proportional Drive and Lift Controls
Oscillating Front and Rear Axles for Frame Leveling Ability
18" (.46m) Ground Clearance
High-torque Power Package with Four Wheel Drive
180° Platform Rotation
Dual Front Stabilizers
One-touch Chassis Leveling

Control System
Triple Joystick Interface
Fully Proportional Multi-function Controls

Engine/Power
Two-speed Drive Motors
Kubota 74 HP Tier 4 Final Turbo Diesel
Engine Shutdown Protection

Serviceability
Large Swing Module Doors for Access to all Components
On-board Diagnostics Center
Logically Grouped Components and Numbered Wiring for Easy Reference

Safety & Other Features
Emergency Shut-off at Platform and Lower Controls
12V DC Auxiliary Power Unit
Multi-axis Tilt Sensor
Tilt Alarm and Horn
Foam-filled R4 Lug Tread Tires

Four Wheel Disc Brakes
Platform Swing Gate
Hour Meter
Powder Coat Finish
Machine Tie-downs

Optional Features & Accessories
Flashing Beacon (Continuous)
Automotive Horn
Air Line to Platform, ½ in. (1.27 cm) Inner Diameter
Platform Control Box Cover
Platform Work Lights
Water Line to Platform
Hostile Environment Kit
CE Compliant Options
Australian Compliant Options
Diesel Scrubber Muffler with Spark Arrestor
12kW 3-phase 275A Welder-ready Generator
AC Generator (120V/60Hz – 3000W)
AC Generator (240V/50hz – 2500W)

Weld Leads to Platform
Cold Start Package
Arctic Package
Non-marking Tires
Glazier Side Attachments
Platform Canopy
Pipe Cradle
Cladding Rack
Pipe Rack
Sheet Material Rack
Glazier Rack
Work Bench
Second Year Extended Warranty



MEC Aerial Work Platforms
1401 S. Madera Ave. | Kerman, CA 93630 | USA
Toll Free: 1.877.MEC LIFT | 1.877.632.5438
Tel: 559.842.1500 | Fax: 559.842.1520
Email: info@mecAWP.com | www.mecAWP.com

MEC® & Titan Boom® are registered trademarks of California Manufacturing & Engineering Co., LLC. Protected by multiple patents, see website for details. 97001 DTD 0820

Model	TITAN BOOM® 40-S	
	U.S.	Metric
Working Envelope		
Working Height*	46’*	14.2 m*
Platform Height	40’	12.2 m
Maximum Drive Height	30’	9.1 m
Maximum Forward Telescope (with Stabilizers)	26’ 6"	8 m
Maximum Rearward Platform	11’ 6"	3.5 m
Platform Slider Boom Travel	5’ 10"	1.8 m
Platform Rotation	180° (+90°, -90°)	
Maximum Horizontal Translation	55’@22’ Elevation	16.7 m@6.7 m Elevation
Platform Size and Capacity		
Capacity Total	4,000 lbs	1800 kg
Material Load (within Load Zone)	3,000 lbs	1350 kg
Personnel and Equipment	1,000 lbs	450 kg
Platform Length	22’	6.7 m
Platform Width	90"	2.28 m
Machine Dimensions		
Length (Length with Ladder Removed)	22’ 6" (22’ 0")	6.9 m (6.7 m)
Width (Shipping Width)	96" (90")	2.44 m (2.28 m)
Loading Height	74"	1.9 m
Height with Rails Folded	84"	2.14 m
Weight	24,250 lbs	11,000 kg
Working Conditions		
Gradeability	40%/22°	
Ground Clearance	18"	46 cm
Wheelbase	152"	3.85 m
Approach Angle	38%/21°	
Breakover Angle	40%/22°	
Frame Leveling (Each Side)	10°	
Power		
Engine	Kubota 74 HP Tier 4 Final Turbo Diesel	
Fuel Tank Capacity	32 gallons	120 liters
Hydraulic Oil Capacity	40 gallons	150 liters
Movement		
Steering Modes	2WS, 4WS, Crab Steer	
Inside Turning Radius (4WS)	8'	2.4 m
Outside Turning Radius (4WS)	19'	5.8 m
Drive Speed (Stowed)	4 MPH	6.4 km/h
Drive Speed (Elevated)	0.5 MPH	0.8 km/h
Boom Lift Speed	50 sec	
Boom Lower Speed	50 sec	
Boom Extend Speed	30 sec	
Boom Retract Speed	30 sec	
Platform Translation Speed	15 sec	
*Metric equivalent of working height adds 2m to platform height. U.S. adds 6 ft. to platform height.		
**Weight may vary with certain options or configurations.		

*Metric equivalent of working height adds 2m to platform height. U.S. adds 6 ft. to platform height.
**Weight may vary with certain options or configurations.

Warranty – MEC Aerial Work Platforms carry a one (1) year warranty on defective component parts and a five (5) year warranty on defective structural parts. This warranty applies to the original owner only.

Meets or exceeds the requirements of ANSI A92.20 and CSA B354.6 as applicable. Specifications subject to change without notice. Photos and diagrams in this brochure are for illustrative purposes only. Contact your MEC distributor for detailed instructions on the proper use and maintenance of this equipment.

Distributed by:



Construction Grade Self-Propelled Booms

Titan Boom® 40-S

- Up to 46’ (14 m) working height
- Ultra-deck with 4,000 lb (1800kg) Combined Material and Personnel Capacity
- Huge 22 ft. x 90 in. (6.7 m x 2.28 m) Deck Area
- Three Steering Modes: 2-Wheel Steer, 4-Wheel Steer, and Crab Steer
- Amazing 180° Platform Rotation plus Additional Telescope to get in Close to Work Areas
- Frame Leveling up to 10° each side
- Stabilizer Support for Platform Stability on Heavy Duty Job Sites with One-touch Auto-leveling
- Dual Sliding Centered Side Rails for Fast and Simple Material Loading into Load Zone
- Smooth, Fully-proportional Controls on all Boom and Drive Functions
- 40% Gradeability




Capacity of a Telehandler
Work Area of an Ultra-deck Scissor Lift
Reach and Rotation of a Boom



TITAN BOOM® SERIES

YOUR WORKSHOP IN THE SKY


4,000 lb (1800 kg) Total Capacity*

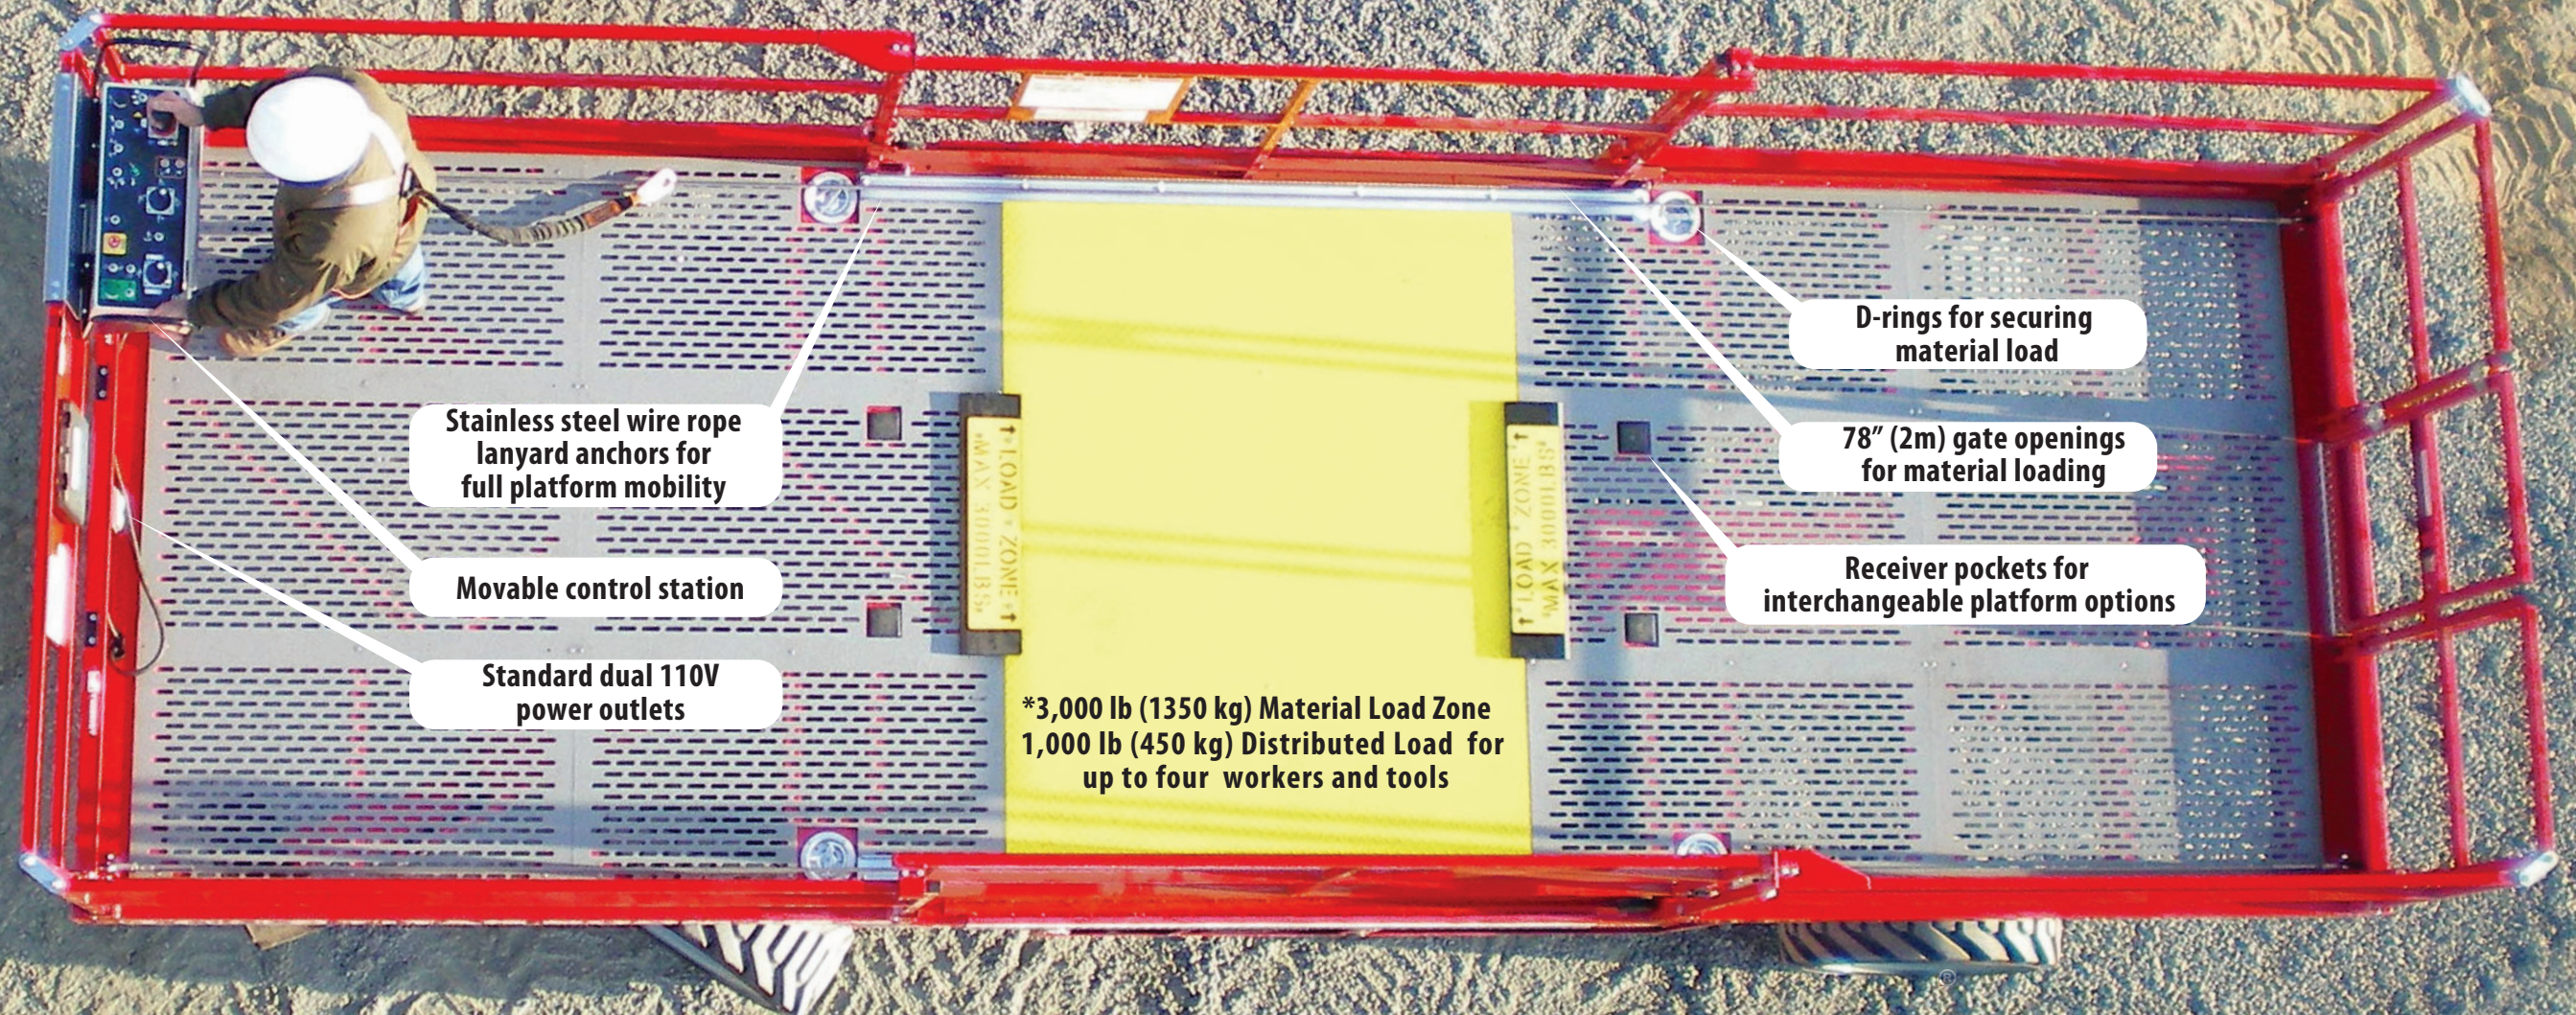


Optional Platform Power

- 3kW A/C Generator
- 12kVA Welder-Ready 3-Phase Generator
- Air Line
- Auxiliary Hydraulic Circuit


Optional Platform Accessories

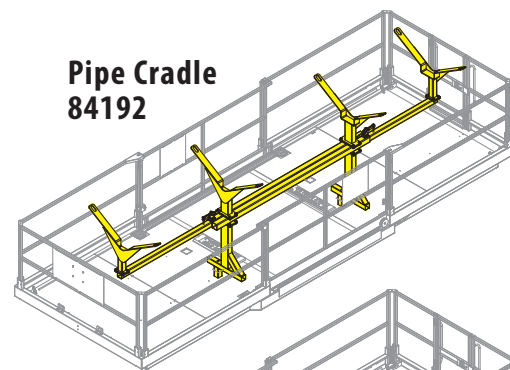


Pipe Cradle
84192

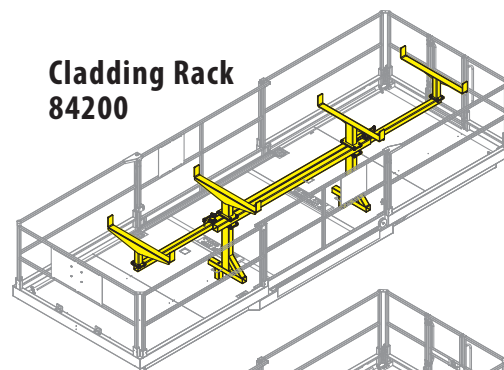


Cladding Rack
84200

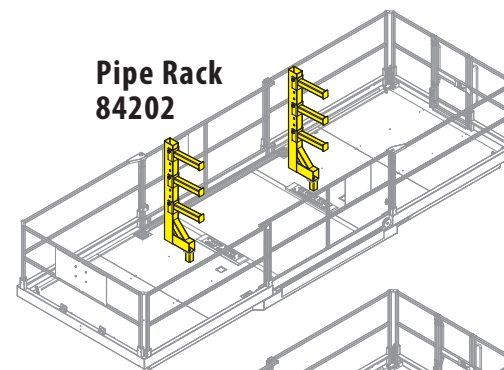


Pipe Rack
84202

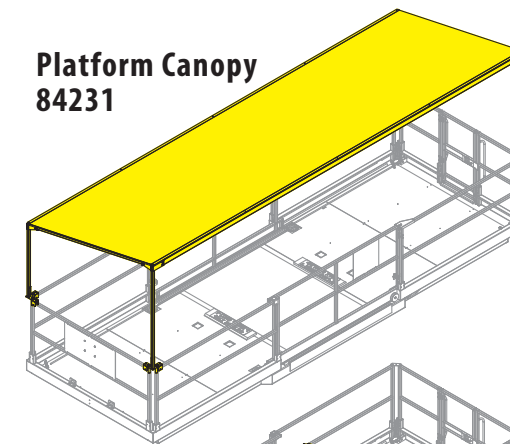


Platform Canopy
84231

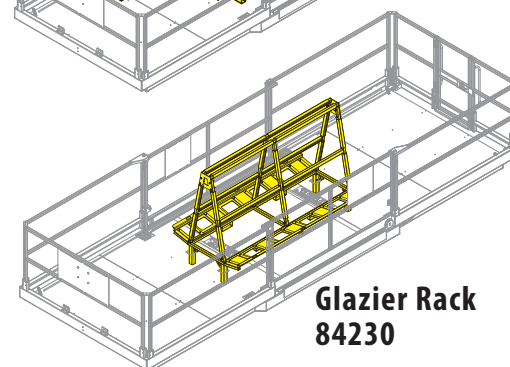


Glazier Rack
84230

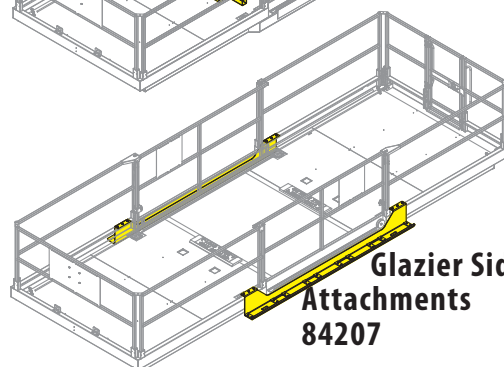

Glazier Side
Attachments
84207

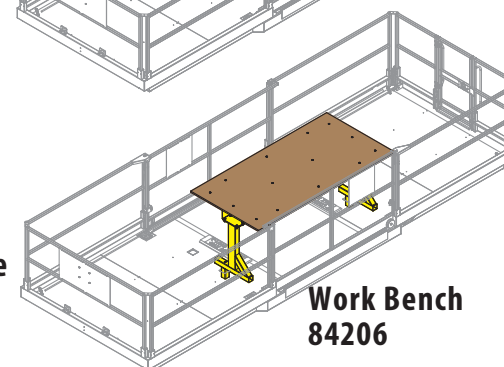

Work Bench
84206

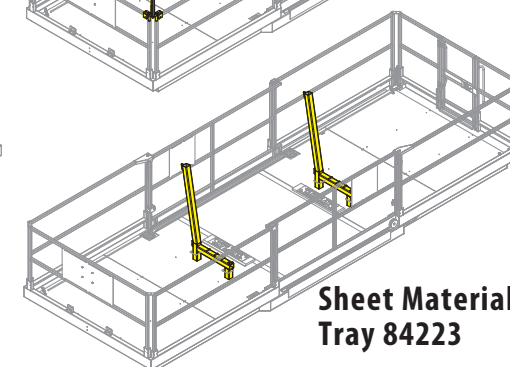

Sheet Material
Tray 84223

