




TITAN BOOM® SERIES

Your Workshop In The Sky 3,000 lb (1350 kg) Total Capacity*

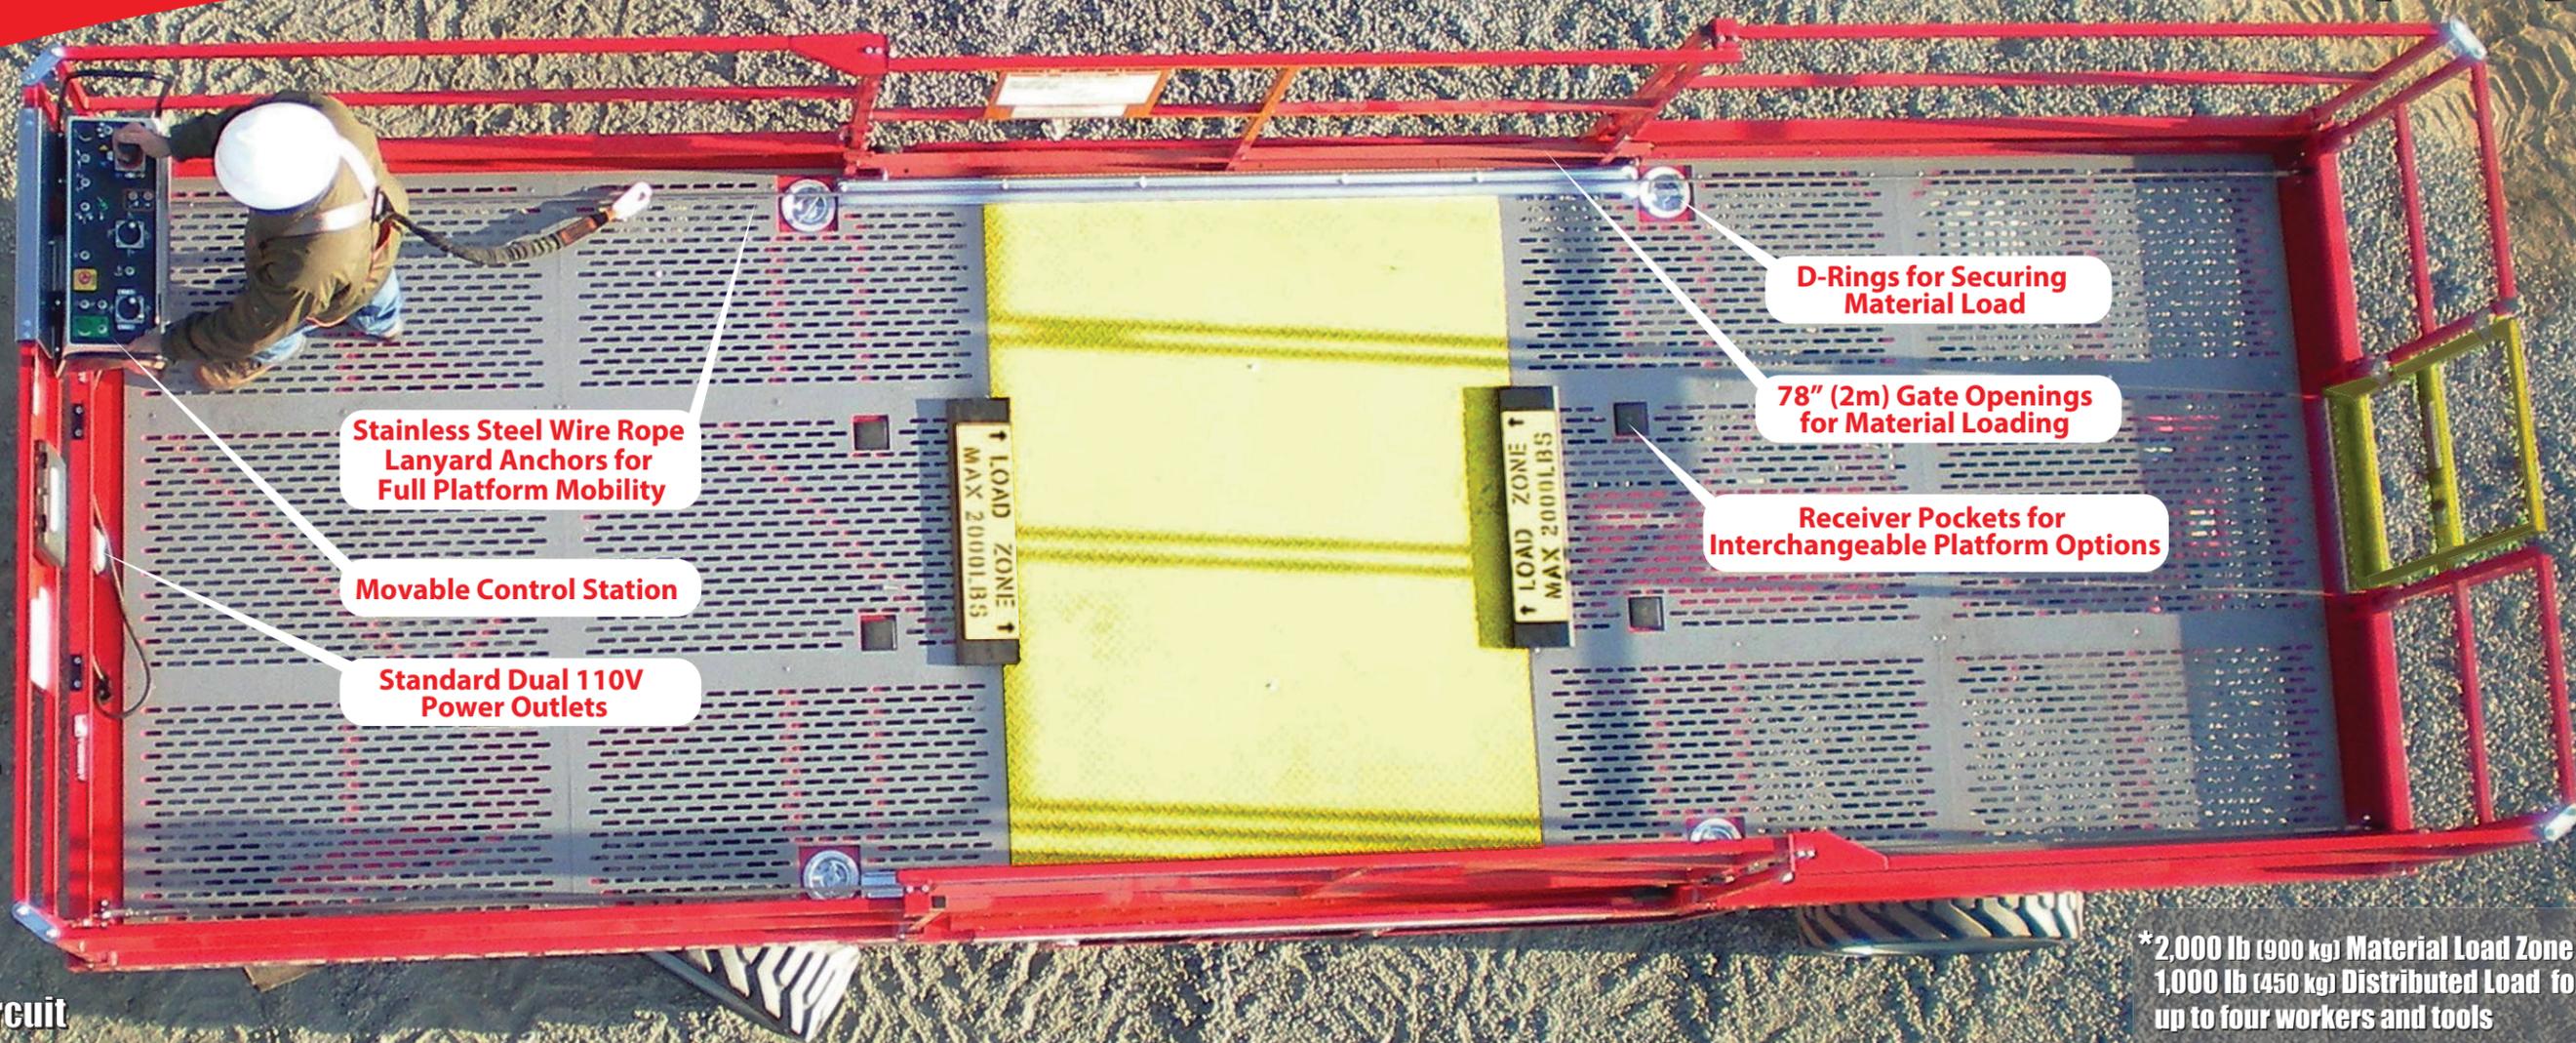

Stainless Steel Wire Rope Lanyard Anchors for Full Platform Mobility

Movable Control Station

Standard Dual 110V Power Outlets

D-Rings for Securing Material Load

78" (2m) Gate Openings for Material Loading

Receiver Pockets for Interchangeable Platform Options


↑ LOAD ZONE ↑
MAX 2000LBS

↑ LOAD ZONE ↑
MAX 2000LBS


*2,000 lb (900 kg) Material Load Zone
1,000 lb (450 kg) Distributed Load for up to four workers and tools

- Optional Platform Power**
- 3kW A/C Generator
 - 12kVA Welder-Ready 3-Phase Generator
 - Air Line
 - Auxiliary Hydraulic Circuit


Optional Platform Accessories

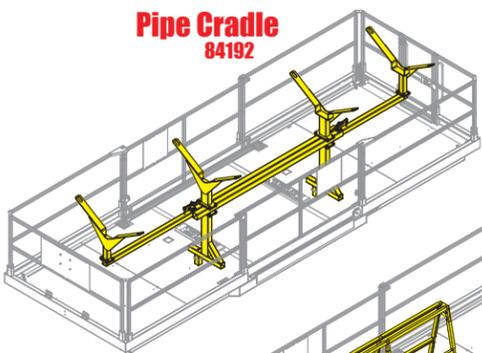


Pipe Cradle
84192

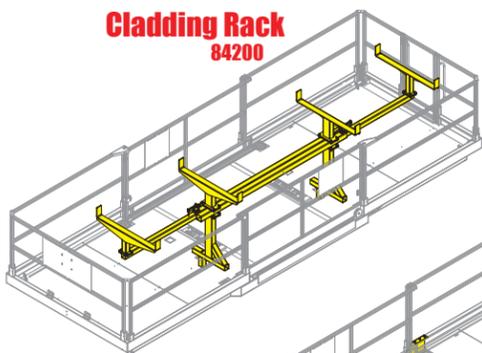


Cladding Rack
84200

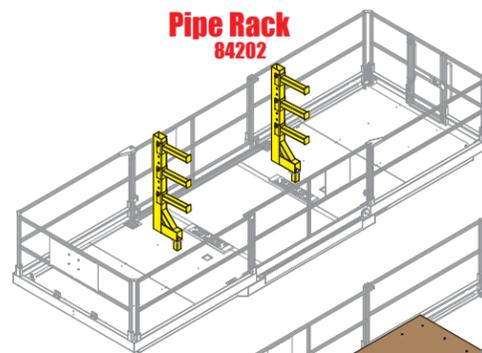


Pipe Rack
84202

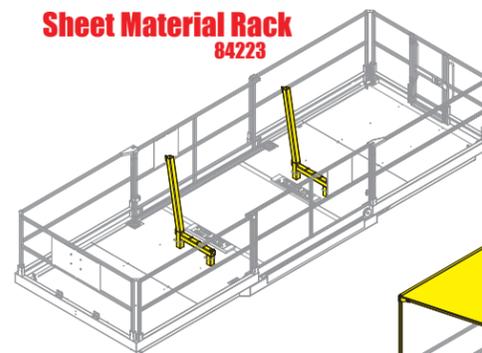


Sheet Material Rack
84223

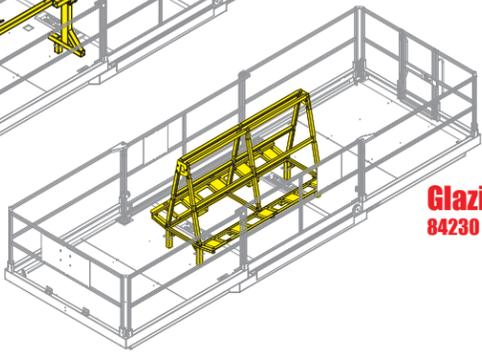


Glazier Rack
84230

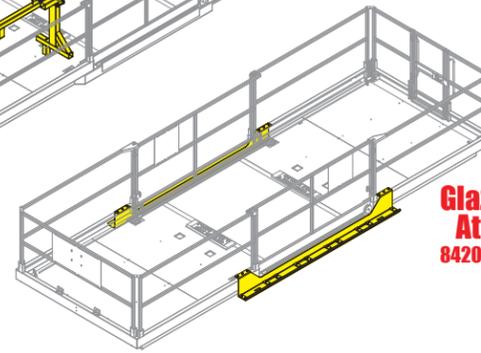

Glazier Side Attachments
84207

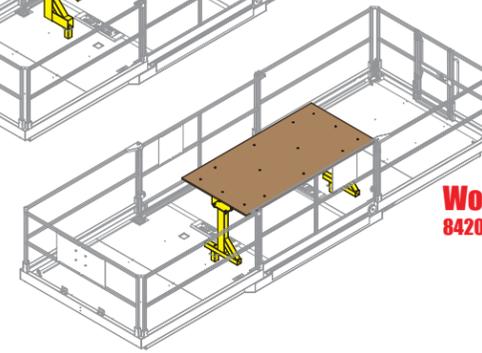

Work Bench
84206

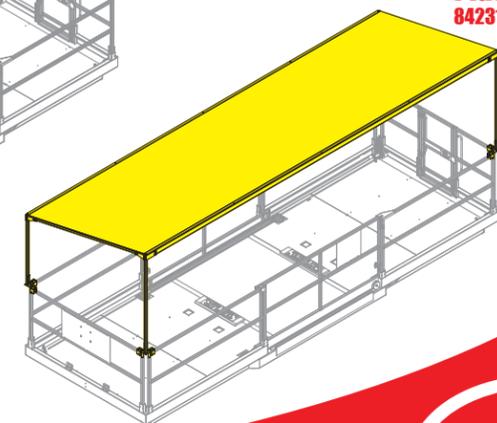

Platform Canopy
84231



Features

Work Area

Non-Skid Metal Deck Construction
 3,000 lb (1350 kg) Combined Platform Capacity:
 2,000 lb (900 kg) Material Load Zone in Center of Platform
 PLUS

1,000 lb. (450 kg) Distributed Load for up to four (4) Workers and Tools
 Stainless Steel Wire Rope Lanyard Anchors for Full Platform Mobility
 Easy Access Sliding Side Gates for Material Loading
 Pinless Guardrail System for Quick & Simple Guard Rail Lowering
 AC Power to the Platform

Performance

Fully Proportional Drive and Lift Controls
 Oscillating Front and Rear Axles for Frame Leveling Ability
 18" (.46m) Ground Clearance
 High-Torque Power Package with Four Wheel Drive
 180° Platform Rotation
 Dual Front and Rear Stabilizers
 One-Touch Chassis Leveling

Control System

Triple Joystick Interface
 Fully Proportional Multi-Function Controls

Engine/Power

Two-Speed Drive Motors
 Kubota Tier 4 Final Turbo Diesel Engine
 Engine Shutdown Protection

Serviceability

Large Swing Module Doors for Access to All Components
 On-Board Diagnostics Center
 Logically Grouped Components and Numbered Wiring for Easy Reference

Safety & Other Features

Emergency Shut-Off at Platform and Lower Controls	Platform Swing Gate Hour Meter
12V DC Auxiliary Power Unit	Powder Coat Finish
Multi-Axis Tilt Sensor	Machine Tie-Downs
Tilt Alarm and Horn	Flashing Beacon (Continuous)
Foam-Filled R4 Lug Tread Tires	Automotive Horn
Four Wheel Disc Brakes	

Optional Features & Accessories

Air Line to Platform, ½ in. (1.27 cm) Inner Diameter	12kW 3-Phase 275A Welder-Ready Generator
Platform Control Box Cover	AC Generator (120V/60Hz - 3000W)
Platform Work Lights	AC Generator (240V/50Hz - 2500W)
Water Line to Platform	Weld Leads to Platform
Glazier Rack	Glazier Side Attachments
Cladding Rack	Platform Canopy
Work Bench	Pipe Cradle
Pipe Rack	Sheet Material Rack
Cold Start Package	Second Year Extended Warranty
Arctic Package	



MEC Aerial Work Platforms

1401 S. Madera Ave. | Kerman, CA 93630 | USA
 Toll free: 1.877.MEC LIFT | 1.877.632.5438
 Tel: 559.842.1500 | Fax: 559.842.1520
 Email: info@mecAWP.com
 www.mecAWP.com

MEC® and Titan Boom® are registered trademarks of California Manufacturing & Engineering Co., LLC. Protected by multiple patents, see website for details. 97026 DTD 1122

Model	TITAN BOOM® 60-S	
	U.S.	Metric
Working Envelope		
Working Height*	66'*	20 m*
Platform Height	60'	18.3 m
Maximum Drive Height	40'	12.2 m
Maximum Forward Telescope (with Stabilizers)	48'	14.6 m
Maximum Rearward Platform	10'	3 m
Platform Slider Boom Travel	8'	2.4 m
Platform Rotation	180° (+90°, -90°)	
Maximum Horizontal Translation	75'@24' Elevation 23 m@7.3 m Elevation	
Platform Size and Capacity		
Capacity Total	3,000 lbs	1350 kg
Material Load (within Load Zone)	2,000 lbs	900 kg
Personnel and Equipment	1,000 lbs	450 kg
Platform Length	22'	6.7 m
Platform Width	90"	2.28 m
Machine Dimensions		
Length (length with ladder removed)	23' (22' 6")	7 m (6.9 m)
Width (width with stabilizers down)	102" (144")	2.6 m (3.7 m)
Width - Shipping	91"	2.3 m
Loading Height	80"	2 m
Height With Rails Folded	94"	2.4 m
Weight	39,700 lbs	18,000 kg
Working Conditions		
Gradeability	40%/22°	
Ground Clearance (under axles)	16"	41 cm
Ground Clearance (under center of machine)	18"	46 cm
Wheelbase	160"	4 m
Approach Angle	36%/20°	
Breakover Angle	40%/22°	
Frame Leveling (each side)	10°	
Power		
Engine	Kubota 74 hp Tier 4 Final Turbo Diesel	
Fuel Tank Capacity	40 gallons	150 liters
Hydraulic Oil Capacity	50 gallons	190 liters
Movement		
Steering modes	2WS, 4WS, Crab Steer	
Inside Turning Radius (4WS)	10'	3 m
Outside Turning Radius (4WS)	24'	7.3 m
Drive Speed (Stowed)	4 MPH	6.4 km/h
Drive Speed (Elevated)	0.5 MPH	0.8 km/h
Boom Lift Speed	60 sec	
Boom Extend Speed	45 sec	
Boom Lift & Extend Combined Speed	75 sec	
Platform Translation Speed	20 sec	

*Metric equivalent of working height adds 2m to platform height. U.S. adds 6 ft. to platform height.
 **Weight may vary with certain options or configurations.

Warranty – MEC Aerial Work Platforms carry a one (1) year warranty on defective component parts and a five (5) year warranty on defective structural parts. This warranty applies to the original owner only.

Meets or exceeds the requirements of ANSI A92.20 and CSA B354.6 as applicable. Specifications subject to change without notice. Photos and diagrams in this brochure are for illustrative purposes only. Contact your MEC distributor for detailed instructions on the proper use and maintenance of this equipment.

Distributed by:



Construction Grade Self-Propelled Booms

Titan Boom® 60-S

- Up to 66' (20 m) Working Height
- Ultra-Deck with 3,000 lb (1350 kg) Combined Material and Personnel Capacity
- Huge 22 Feet x 90 Inch (6.7 m x 2.28 m) Deck Area
- Three Steering Modes: 2-Wheel Steer, 4-Wheel Steer, and Crab Steer
- Amazing 180° Platform Rotation Plus Additional Telescope to Get in Close to Work Areas
- Frame Leveling up to 10° Each Side
- Stabilizer Support for Platform Stability on Heavy Duty Job Sites with One-Touch Auto-Leveling
- Dual Sliding Centered Side Rails for Fast and Simple Material Loading into Load Zone
- Smooth, Fully-Proportional Controls on All Boom and Drive Functions
- 40% Gradeability

The Capacity of a Telehandler
 The Work Area of an Ultra-Deck Scissor Lift
 The Reach and Rotation of a Boom

