


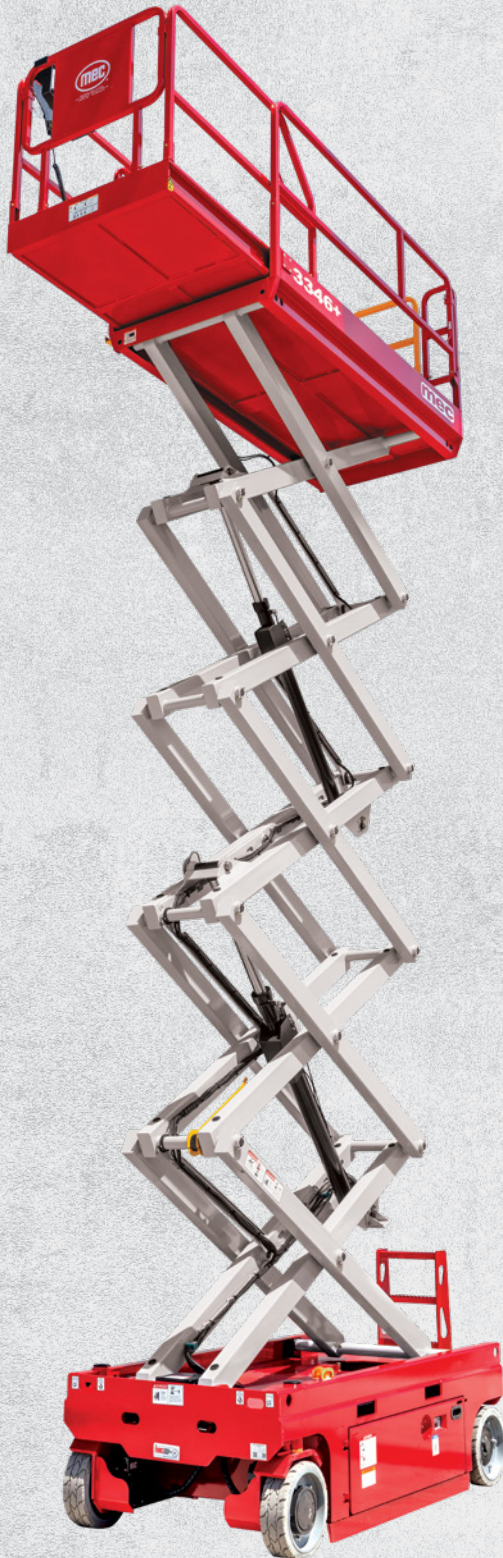

# 3346+

---

## PLUS Series

### High Capacity Compact Scissor with 39' Indoor Working Height

- 900 lb platform capacity and 300 lb deck extension capacity support multiple workers and materials
- 47.5" wide with front wheel AC direct electric-drive for jobsite maneuverability
- Drives at full height indoors, no outriggers required
- Proportional descent provides smoother positioning while regenerating energy for 22% greater duty cycles
- MEC's patented Leak Containment System® comes standard to help contain hydraulic leaks  
Patent #11,112,060
- Improved non-marking rubber tire compound for longer wear and extended tire life



## Standard Features

### Performance

- Front wheel AC direct-electric drive
- Fully proportional drive & lift controls

### Safety

- Entrapment mitigation designed into controls
- Active pothole protection
- Emergency shut-off at platform & lower controls
- Non-skid metal deck construction
- Descent & all-motion alarms
- Flashing beacon
- Drive speed interlock
- Multi-axis tilt sensor
- Multiple disc brakes
- Scissor maintenance lock
- Automatic parking brake

### Serviceability

- Leak Containment System® (LCS)
- Lubrication-free scissor bearings
- Battery charger
- Slide-out service tray
- Onboard diagnostics – no analyzer tool required
- Hour meter
- Machine tie down points

### Other Features

- Self-closing, platform gate with magnetic latch
- Theft deterrent control box bracket
- Lockable battery disconnect
- Side & rear forklift pockets
- Sheet Material Tray

## Options & Accessories

- Upper Control Box Guard
- 1,000W Inverter
- Tool Tray
- Cold Weather Package
- Proactive Platform Safety System® (PPSS)
- Perimeter Laser Lighting
- Anti-Fatigue Mat
- Pipe Racks
- Extended Warranty

#### MEC Aerial Work Platforms

Tel: 559.710.2425  
Toll free: 1.877.725.4515  
1401 S. Madera Ave., Kerman, CA 93630 USA  
Email: info@MECawp.com  
www.MECawp.com

MEC®, Leak Containment System®, and Proactive Platform Safety System® are registered trademarks of California Manufacturing & Engineering Co., Inc. Leak Containment System® is Patent #11,112,060. 97102 DTD 072026

|                                  | US                           | Metric            |
|----------------------------------|------------------------------|-------------------|
| Height – Indoor                  |                              |                   |
| Maximum Working Height*          | 38 ft 9.6 in*                | 12.0 m*           |
| Maximum Platform Height*         | 32 ft 9.6*                   | 10.0 m*           |
| Maximum Drive Height             | 32 ft 9.6                    | 10.0 m            |
| Height – Outdoor                 |                              |                   |
| Maximum Working Height*          | 32 ft*                       | 9.9 m*            |
| Maximum Platform Height*         | 26 ft*                       | 7.9 m*            |
| Maximum Drive Height             | 26 ft                        | 7.9 m             |
| Platform                         |                              |                   |
| Total Lift Capacity              | 900 lb                       | 408.2 kg          |
| Maximum Capacity (Occupants)     | 2 (Indoors) 1 (Outdoors)     |                   |
| Platform Length (Extended)       | 10 ft 4.5 in                 | 3.2 m             |
| Platform Length (Retracted)      | 7 ft 5.3 in                  | 2.3 m             |
| Platform Width                   | 3 ft 8.1 in                  | 1.1 m             |
| Roll-Out Deck Extension          | 34.7 in                      | 0.9 m             |
| Platform Entry                   | Full-Height Swing Gate       |                   |
| Lanyard Attachment Points        | 4                            |                   |
| Key Overall Dimensions           |                              |                   |
| Length Stowed (Ladder/No ladder) | 8 ft 2 in / 7 ft 5.3 in      | 2.5 m / 2.3 m     |
| Overall Width                    | 3 ft 11.5 in                 | 1.2 m             |
| Wheelbase                        | 7 ft 5.3 in                  | 2.3 m             |
| Overall Height - Rails Up        | 8 ft 2 in                    | 2.5 m             |
| Overall Height - Rails Folded    | 6 ft 3 in                    | 1.9 m             |
| Weight** (Approximate)           | 6,140 lb**                   | 2,785 kg**        |
| Drive Performance                |                              |                   |
| Type                             | Proportional                 |                   |
| Inside Turning Radius            | 0 in                         | 0 m               |
| Gradeability                     | 30% (16.7°)                  |                   |
| Ground Clearance - Lowered       | 4 in                         | 10.2 cm           |
| Ground Clearance - Elevated      | 0.7 in                       | 1.8 cm            |
| Maximum Drive Speed - Lowered    | 3.8 mph                      | 6.1 km/h          |
| Maximum Drive Speed - Elevated   | 0.43 mph                     | 0.7 km/h          |
| Lift/Lower Speed                 | 55/53 seconds                |                   |
| Tires, Non-Marking               | 15 in x 5 in                 | 38.1 cm x 12.7 cm |
| System Details                   |                              |                   |
| Power Source                     | (4) 6V AGM Batteries, 200 Ah |                   |

\*Metric equivalent of working height adds 2 m to platform height. US adds 6 ft to platform height.

\*\*Weight may vary with certain options or configurations.

**Important** – MEC lifts must be on a hard level surface while elevated.

**Warranty** – MEC Aerial Work Platforms carry a one (1) year warranty on defective component parts and a five (5) year warranty on defective structural parts. This warranty applies to the original owner only. Consult your MEC dealer for warranty details.

**Meets or exceeds** the requirements of ANSI A92.20 and CSA B354.6.17.

**Specifications** subject to change without notice. Photos and diagrams in this brochure are for illustrative purposes only. Contact your MEC distributor for detailed instructions on the proper use and maintenance of this equipment.